


CFAM WORLD-CLASS FOOD AND FEED PROCESSING EQUIPMENT





TM-SERIES HIGH EFFICIENCY TWIN-SHAFT PADDLE MIXING SYSTEM

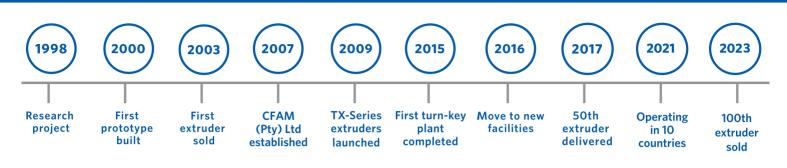

Applications

- High efficiency mixing of dry ingredients
- Can be used as stand-alone batching and mixing system
- Can be integrated with the control system of processing plant

Technical information

- Production capacities from 1 tonne/hour upwards
- Twin-shaft paddle mixer
- Sizes; 100l, 250l, 500l, 1000l, 2000l
- Power requirement ranging between 5 kW and 37 kW
- Can be used to directly feed downstream equipment i.e packaging line, extruders etc.

Features

- Fast mixing; 45 60 seconds per batch
- High accuracy mixing
- Quick discharge of 2 10 seconds
- Fully automated PLC control system
- Available in epoxy coated mild steel, 3Cr12 stainless steel or 304 stainless steel
- 24-hours local maintenance support
- IOT enabled



info@CFAMinternational.com | www.CFAMinternational.com | +27 (0) 18 285 1031